


TremLock Blocking RI

Perimeter Blocking System

Order Specification Form

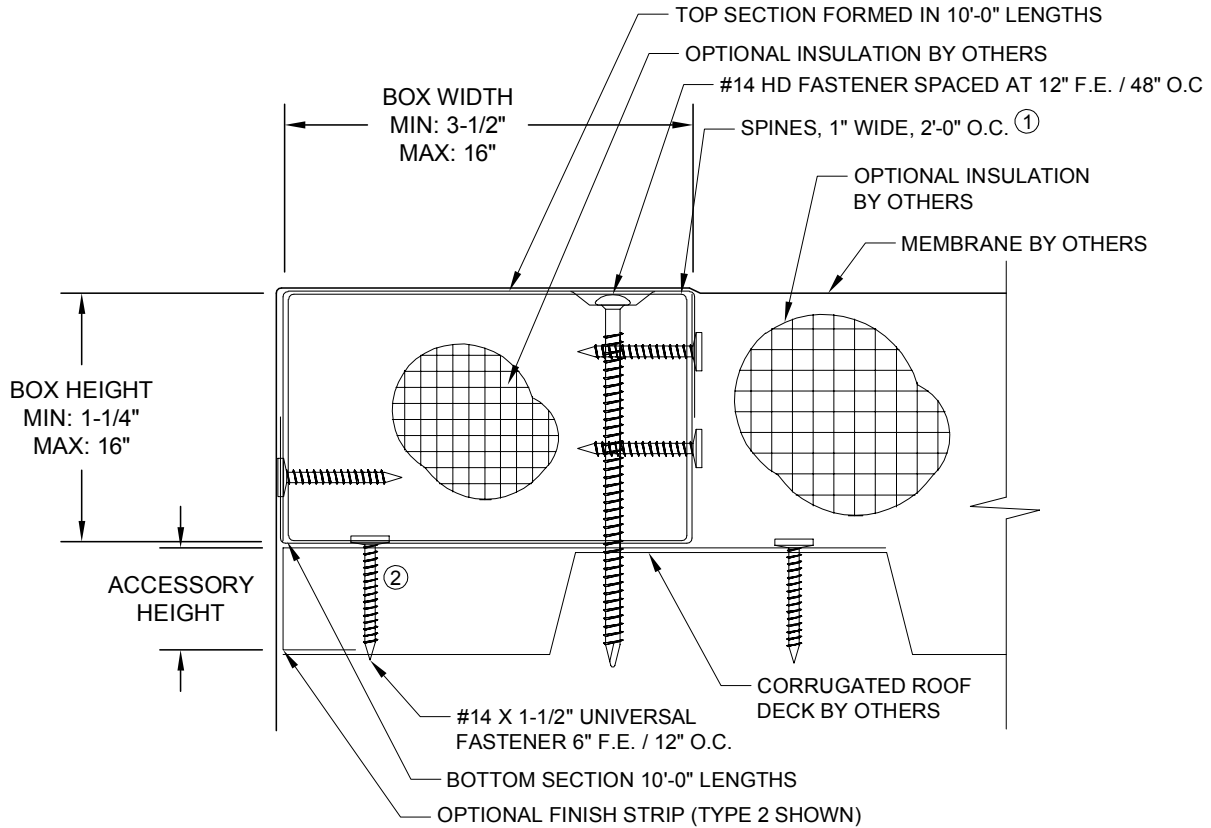

- ① Spines required for box height greater than 6"
- ② Universal fasteners require pre-drilling for masonry applications (min 3/16" pilot hole)

QUANTITY		MATERIAL	ADDITIONAL ACCESSORIES	MATERIAL	
___	Total LF	<input type="checkbox"/> Mill Galvanized	___	Total LF - Finish strip, Type 1	<input type="checkbox"/> Mill Galvanized
___	End Caps (___Left, ___Right)	<input type="checkbox"/> _____	___	Total LF - Finish strip, Type 2	<input type="checkbox"/> _____
___			___	Total LF - Closure strip	
DIMENSIONS		THICKNESS	___	Height	THICKNESS
___	Box Width	<input type="checkbox"/> 20 GA			<input type="checkbox"/> 20 GA
___	Box Height	<input type="checkbox"/> _____			<input type="checkbox"/> _____

APPROVALS: Contact manufacturer for verification of test report data on your project.



CUSTOMER APPROVAL

- Approved for Fabrication
- Approved with Changes
- Not Approved

Authorized Customer Signature _____

Title _____ Date _____

Job Name:	Job #:	By:
Customer:	Project Location:	Date:
Representative:	Architect:	Sheet of _____

TremLock Blocking RI

Perimeter Blocking System

