

PRODUCT DATA SPECIFICATIONS

The most efficient method for dispensing OlyBond500 canister adhesives.

The OMG BeadPro Multi-Bead Cart is the most efficient method for applying OlyBond500 Canister adhesives, and allows contractors to simultaneously apply OlyBond 500 adhesives in either four beads spaced 12-inches on center or seven beads spaced 6-inches on center. Just load the cart with the packaged canisters, connect the hoses, and you are good to go. The straight line bead application helps contractors achieve published coverage rates for maximum productivity.

FEATURES & BENEFITS

- Guaranteed 12-inch on center or 6-inch on center adhesive bead spacing for a better quality installation.
- Maximum yield and productivity per canister set.
- Single person application that eliminates the need for bringing wagons and wheelbarrows onto the roof.
- No moving parts to maintain and solid tires that won't go flat.
- Single handle position makes it easy to start and stop the adhesive flow.



Extra Hoses Available



Assembly Required

APPLICATION

The adhesive is applied in pre-foamed beads that quickly rise to approximately 1-in. above the substrate. The board is then laid into the adhesive and walked into place. A chemical cure takes place in a few minutes after application depending on the weather conditions. The adhesive is designed for use in temperatures of 40°F to 100°F (4°C to 38°C), and with 4-ft. x 4-ft. (maximum) for most insulation boards.

ROOF DECKS AND SUBSTRATES

- Structural concrete.
- Gypsum.
- Cementitious wood fiber plank.
- Lightweight insulating concrete.
- Steel (22 Ga. or thicker with approved cross section).
- Plywood (5/8-in. thick min.).
- Smooth surface BUR.
- Smooth and granular surface modified bitumen (properly prepared).
- Existing sprayed in place polyurethane foam.
- Base sheets.
- Most vapor barriers (including asphaltic and fleece-top).


PRODUCT DATA SPECIFICATIONS

ROOF INSULATION AND COVER BOARD

- Expanded Polystyrene.
- Polyisocyanurate (4-ft. x 4-ft.).
- High Density Wood Fiber.
- Perlite.
- Certain Extruded Polystyrene.
- Most cover boards.

APPROVALS

OlyBond500 is approved by most roof system manufacturers and is Factory Mutual, Miami Dade, Florida Building Code and Underwriters Laboratories approved.

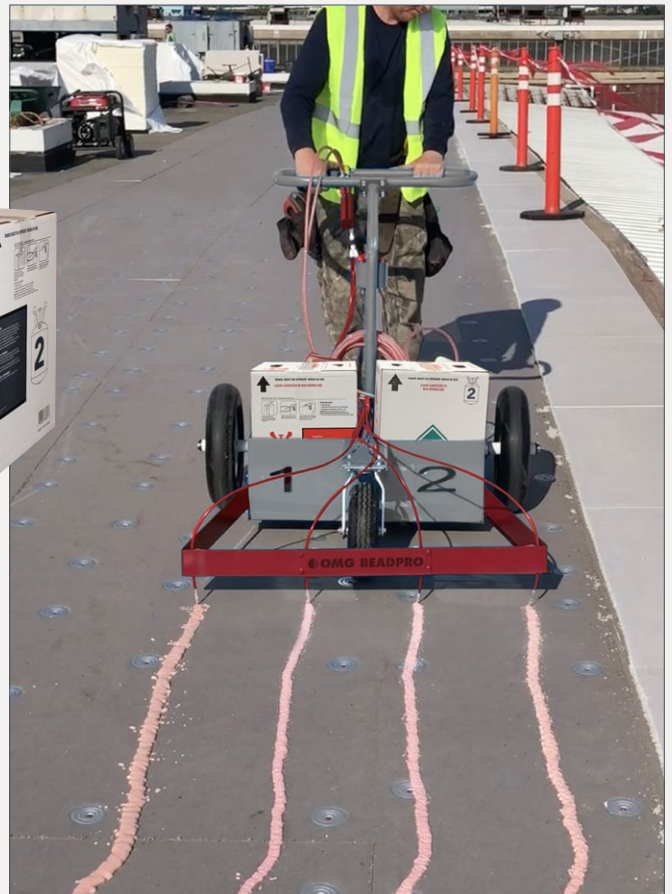

ORDERING INFORMATION

CAT. NO.	DESCRIPTION	WEIGHT		PACKAGING
		LBS		
OB500PT-GunKit	Replacement hose and gun set	5		Each
OB500PT-MixTip10	Bag of Ten Mix Tips	3		10
OB500PT-MTipExt10	Bag of Ten Mix Tip Extension Tubes	2		10

For more information, contact your local OMG sales representative, call 800.633.3800 or visit www.OMGRoofing.com.

OMG is a leading U.S. supplier of roofing fasteners, roof insulation adhesives, retrofit roof drains, pipe supports, engineered edge metal systems and rooftop productivity tools. Our products are available nationwide through a network of roofing distributors, and supported by our national network of direct factory sales personnel.