




Offset Face Gutter with Roof Flange.

ORDER SPECIFICATION FORM

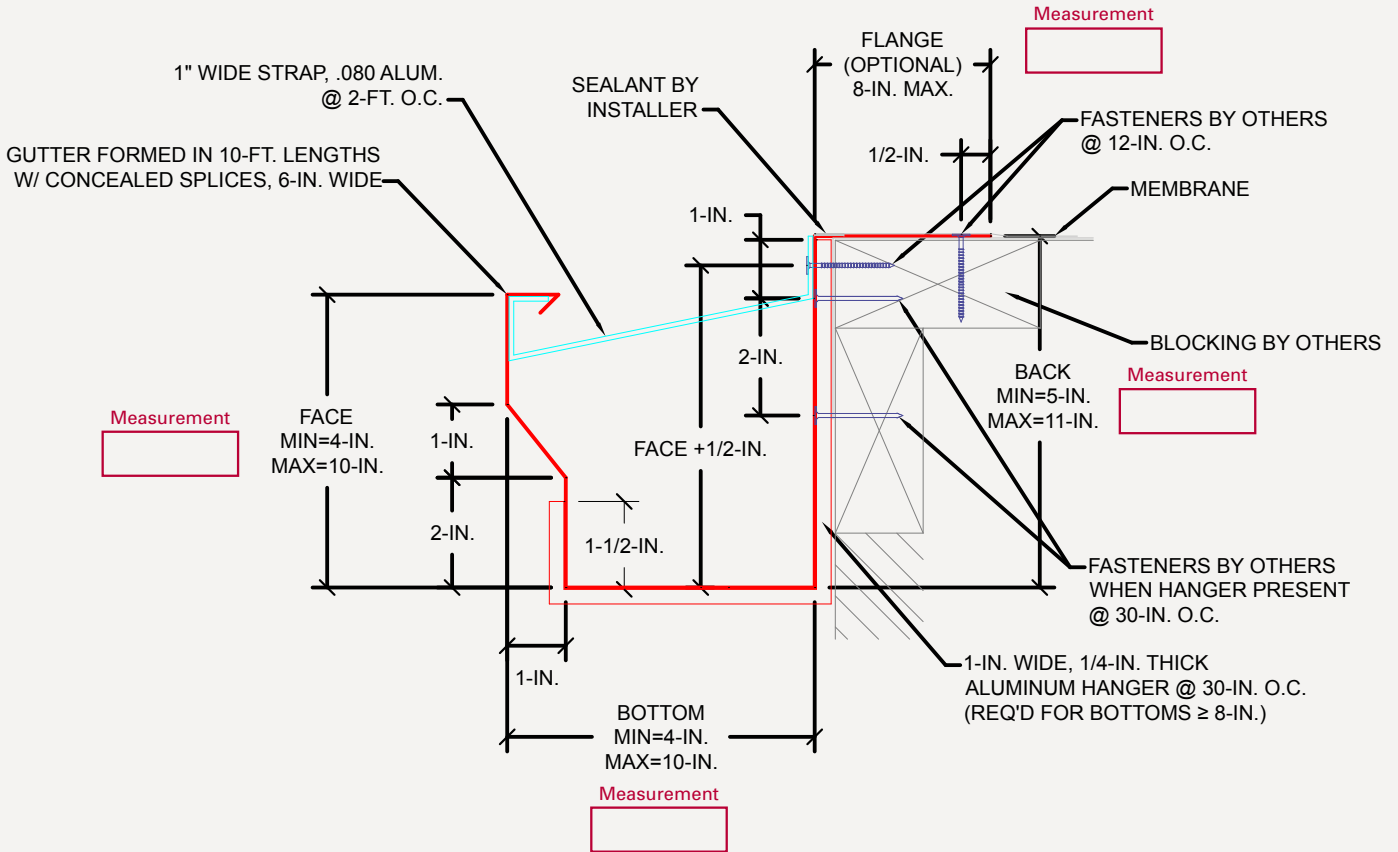

FOR MASONRY APPLICATIONS, PLEASE CONTACT OMG.

CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA


QUANTITY	CAP MATERIAL	THICKNESS	ACCESSORY TYPE	CAP FINISH
___ Total LF (10' pcs)	Aluminum	0.040	Welded	Mill Finish
___ Miters (___ Outside, ___ Inside)	Galvanized	0.050	Metal-Lok	Prefinished Kynar
___ End Caps (___ Left, ___ Right)	Stainless Steel	0.063		Post Finished Kynar
___ Expansion Joints (If Required)		0.080	HANGERS	Prefinished Anodized
___ Radius LF (5'-0" pcs)		24 Ga.	Painted	Post Finished Anodized
	COLOR	22 Ga.	Mill	
			None	

APPROVALS: Contact manufacturer for verification of test report data on your project. <div style="border: 1px solid black; padding: 5px; display: inline-block;">ANSI/SPRI/GT-1/Tested</div>	CUSTOMER APPROVAL Authorized Customer Signature Approved for Fabrication Approved with Changes Not Approved	_____ Title Date
	Job Name: Customer: Representative:	Job #: Project Location: Architect:



Offset Face Gutter with Roof Flange.

ORDER SPECIFICATION FORM

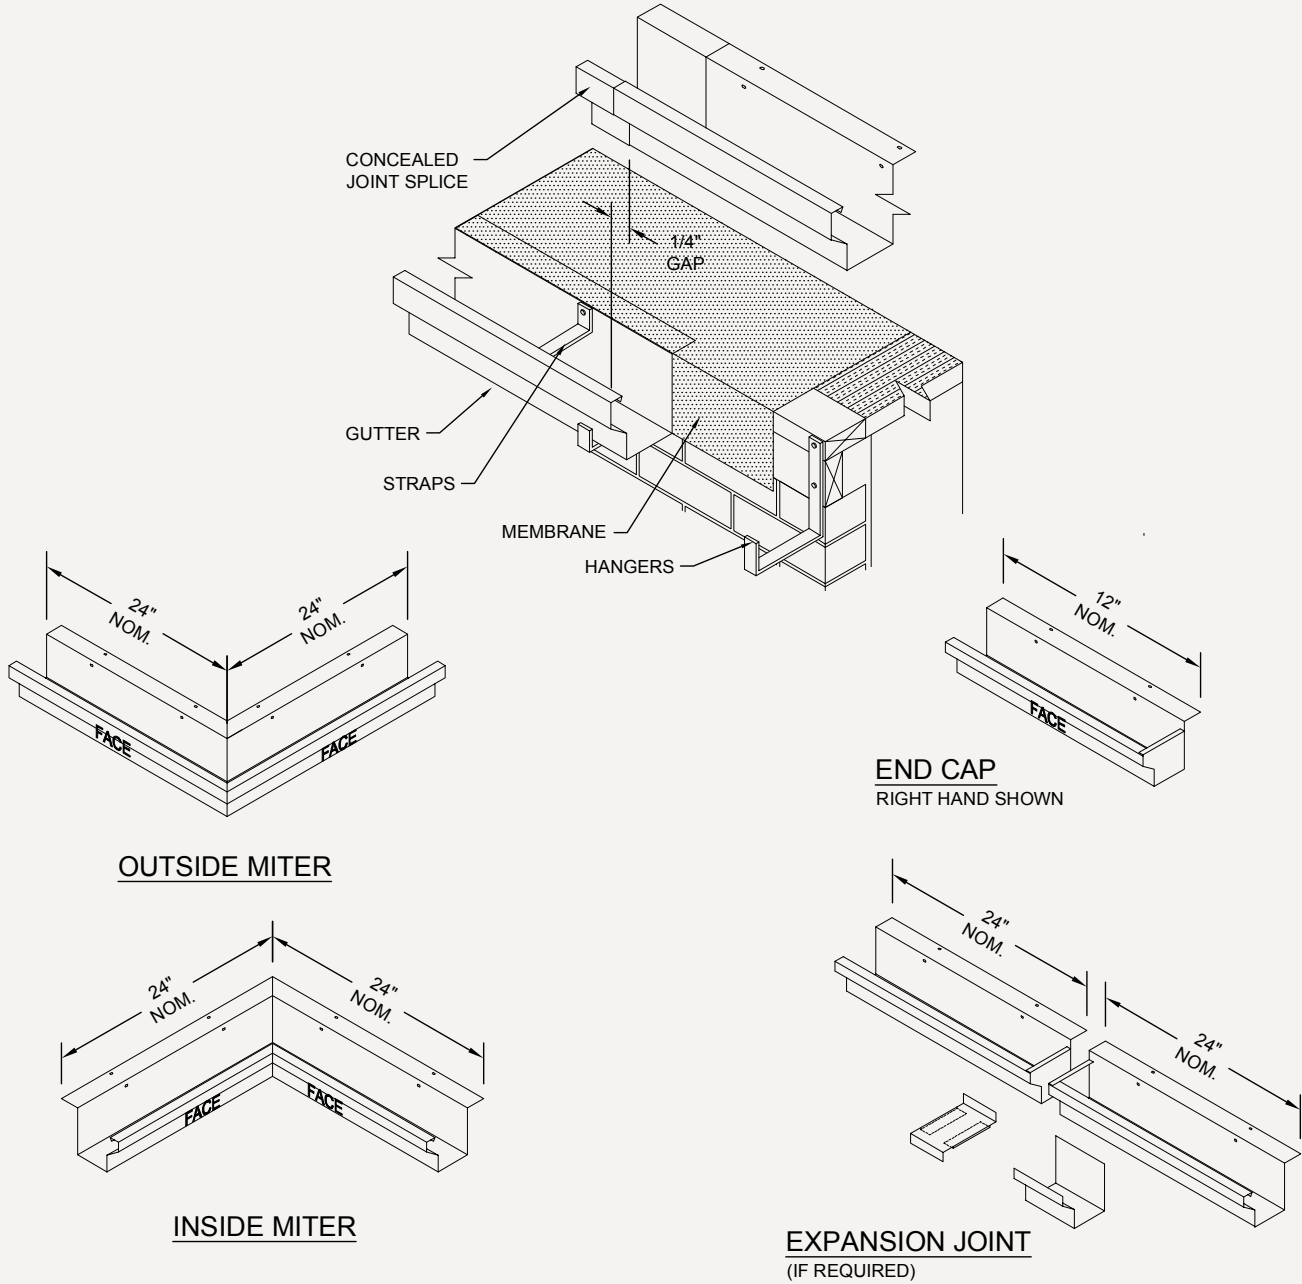

Standard gutter miter leg lengths are 24" Nominal
 Standard gutter miter angle is 90°
 For special miter requirements, attach sketches or consult manufacturer for assistance.



EdgeSystems

4 COMMERCE WAY, ARDEN NC 28704 USA
 800-892-9173 828-676-1700 OMGROOFING.COM

Copyright © 2020 OMG, Inc. All rights reserved.

Superior productivity.
 Superior performance.

