



Plastic Plates

PRODUCT DATA SPECIFICATIONS

PRODUCT DESCRIPTION

OMG Plastic Plates are FM approved and CE marked. OMG 50 mm (2-in.) plates should be used for lap seam fastening. OMG 75 mm (3-in.) plates should be used when fastening insulation.

All OMG Plastic Plates are round and designed to be used with OMG fasteners.

APPLICATION

50 mm (2-in.) Locking Plastic Plate:

Attaches single-ply membrane to the substrate. Compatible with OMG #12 Standard RoofGrip®, OMG #14 Heavy Duty and OMG #15 XHD Fasteners.

75 mm (3-in.) Locking Plastic Plate:

Attaches insulation to the substrate. Compatible with OMG #12 Standard RoofGrip, OMG #14 Heavy Duty and OMG #15 XHD Fasteners.

APPROVALS


Check with roofing system manufacturer for FM approvals for specific plates and assemblies.



ETA-09/0337



Factory Mutual listings refer to these products as: OMG Plastic Insulation Plate 3-in.; and 2-in. Barbed Plastic Seam Plate.

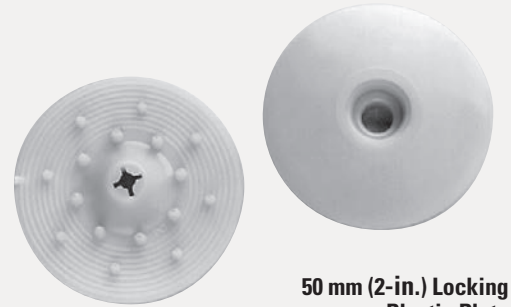

50 mm (2-in.) Locking Plastic Plate



75 mm (3-in.) Locking Plastic Plate

PHYSICAL DATA* & ORDERING INFORMATION

PRODUCT	CAT. NO.	SIZE MM (IN)	MATERIAL	PKG QTY	WEIGHT KG (LBS)
50 mm (2-in.) LOCKING PLASTIC PLATE	NTBLP50	50 (2)	Nylon	1000	7.72 (17)
75 mm (3-in.) LOCKING PLASTIC PLATE	PLL75	75 (3)	Polypropylene	1000	10.90 (24)

*All sizes are nominal.



ROOFING PRODUCTS

153 BOWLES ROAD,
AGAWAM, MA 01001 USA
+1 413.789.0252

INFOEUROPE@OLYFAST.COM
WWW.OMGROOFING.COM

RoofGrip® is a registered trademark of OMG, Inc.
Copyright © 2018 OMG, Inc. All rights reserved.

Superior productivity. Superior performance.

Europe Market Manager:
Lennard Spirig
LSpirig@olyfast.com
Mob: +41 79 200 19 30
Office: +41 71 599 19 30

Benelux:
Ruud Veldwijk
RVeldwijk@olyfast.com
Mob: +31 6 28376030

United Kingdom:
Mick Steeples
MSteeples@olyfast.com
Mob: +44 7824 364850

