



AccuTrac® Plate

PRODUCT DATA SPECIFICATIONS

PRODUCT DESCRIPTION

OMG AccuTrac® Steel Insulation Plates are made of Galvalume® coated steel and are available in two designs.

A 3-in. (75 mm) square, recessed AccuTrac Plate is to be used with OMG manufactured hex head fasteners, Phillips head fasteners or square drive fasteners.

A 3-in. (75 mm) square AccuTrac flat-bottom plate is to be used with OMG manufactured Phillips head fasteners only.

OMG AccuTrac Steel Insulation Plates should be used when fastening insulation with the OMG AccuTrac Tool.

FEATURES & BENEFITS

- Factory Mutual and Dade County approved.
- Recessed AccuTrac Plates feature deep reinforcing ribs for superior resistance to bending.
- AccuTrac flat-bottom plates can be used with hard board insulations.
- Using the AccuTrac System can improve installation productivity when compared to traditional installation methods.
- AccuTrac Plates are packaged 125 per sleeve for easy loading in the AccuTrac Tool.
- AccuTrac Plates are packed in weather-proof buckets along with two Phillips drive bits.


APPLICATION

For use with OMG manufactured #12 standard fasteners, #14 heavy duty fasteners, #15 fasteners up to 6-in. (150 mm), and the OMG AccuTrac Tool to attach insulation.

APPROVALS



Factory Mutual listings refer to this product as **AccuTrac Flat Bottom** and **AccuTrac Plate**.

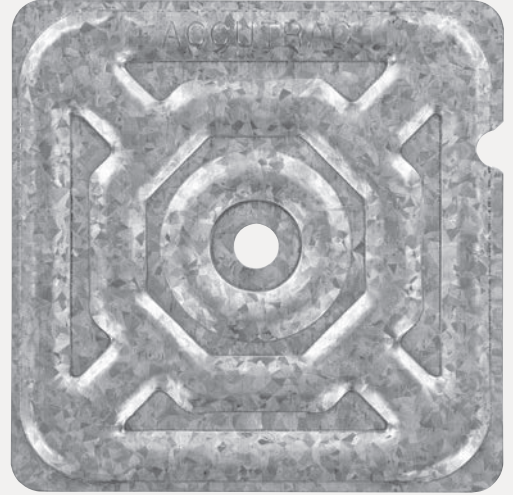

PHYSICAL DATA *

The data below is constant for each OMG AccuTrac Plate.

MATERIAL	SIZE
Galvalume® coated steel	3" (75 mm) square

ORDERING INFORMATION

CAT. NO.	STYLE	PKG QTY	WEIGHT LBS (KG)
BKT6862904	Flat	1000/bucket	43 (19.52)
BKT6123904	Recessed	1000/bucket	43 (19.52)
6626910	AccuTracTool	1	34 (15.44)

*All sizes are nominal.

AccuTrac Plates are designed to be used with the ergonomically correct stand-up AccuTrac Tool.



ROOFING PRODUCTS

153 BOWLES ROAD, AGAWAM, MA 01001 USA
800-633-3800 413-789-0252 OMGROOFING.COM

AccuTrac® is a registered trademark of OMG, Inc. Copyright © 2018 OMG, Inc. All rights reserved.

Superior productivity.
Superior performance.

